

Features


- Low on-resistance
- Fast switching speed
- Easily designed drive circuits
- Easy to parallel Portable equipment

Application

- Interfacing, Switching



Product Summary

V_{DS}	$R_{DS(ON)}$ TYP	I_D
30V	1.0Ω@4.0V	0.56A
	1.5Ω@2.5V	



TR8: Device code
X: Code

Marking and pin assignment

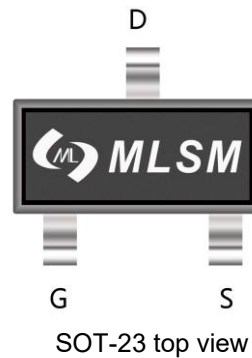

Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	Rating	Unit
--------	-----------	--------	------

Common Ratings (TC=25°C Unless Otherwise Noted)

V _{DS}	Drain-Source Breakdown Voltage		30	V
V _{GS}	Gate-Source Voltage		±20	V
T _J	Maximum Junction Temperature		150	°C
T _{STG}	Storage Temperature Range		-50 to 155	°C
I _S	Diode Continuous Forward Current	Tc=25°C	0.56	A

Mounted on Large Heat Sink

I_{DM}	Pulse Drain Current Tested	$T_c=25^\circ\text{C}$	1.7	A
I_D	Continuous Drain Current	$T_c=25^\circ\text{C}$	0.56	A
P_D	Maximum Power Dissipation	$T_c=25^\circ\text{C}$	0.2	W
ESD	Gate-Source ESD Rating (HBM, Method 3015)		2000	V

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
NTR4003N	SOT-23	TR8	3,000	45,000	180,000	7" reel

Electrical Characteristics (TJ=25°C unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	30	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =30V, V _{GS} =0V	--	--	1.0	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±10	μA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	0.8	1.1	1.4	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =4.0V, I _D =10mA	--	1.0	1.5	Ω
		V _{GS} =2.5V, I _D =8.0mA	--	1.5	2.0	Ω
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =30V, V _{GS} =0V, f=1MHz	--	22	--	pF
C _{OSS}	Output Capacitance		--	3.5	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	2.9	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	V _{DS} =30V, I _D =0.2A, V _{GS} =4.5V	--	1.4	--	nC
Q _{gs}	Gate Source Charge		--	2.1	--	nC
Q _{gd}	Gate Drain Charge		--	0.27	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DD} =30V, I _D =0.2A, V _{GS} =4.5V, R _G =10Ω	--	3.6	--	nS
t _r	Turn-on Rise Time		--	23.2	--	nS
t _{d(off)}	Turn-Off Delay Time		--	5.5	--	nS
t _f	Turn-Off Fall Time		--	23.3	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	Tj=25°C, Is=10mA,	--	0.65	0.7	V

Typical Operating Characteristics

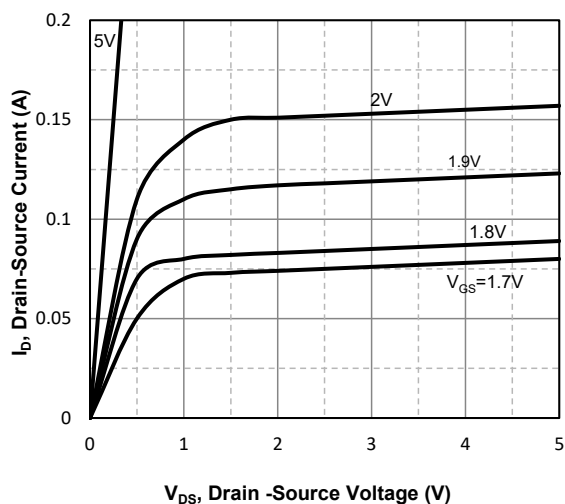


Fig1. Typical Output Characteristics

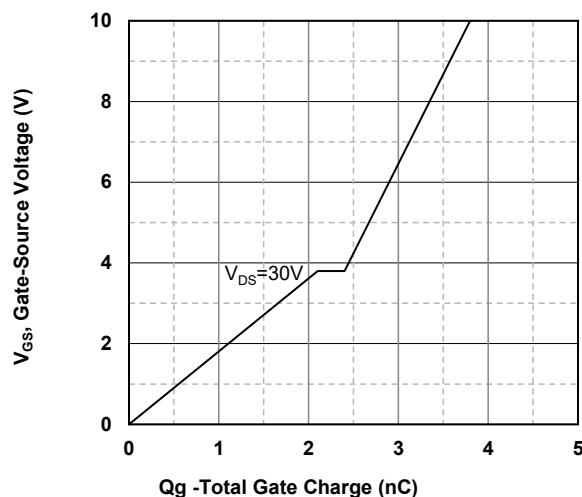


Fig2. Typical Gate Charge Vs. Gate-Source Voltage

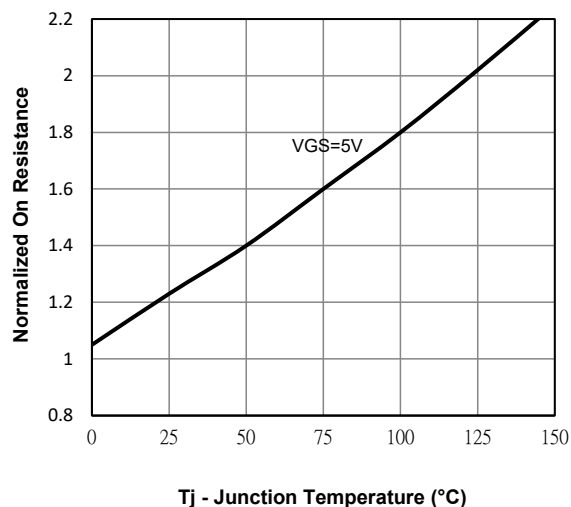


Fig3. Normalized On-Resistance Vs. Temperature

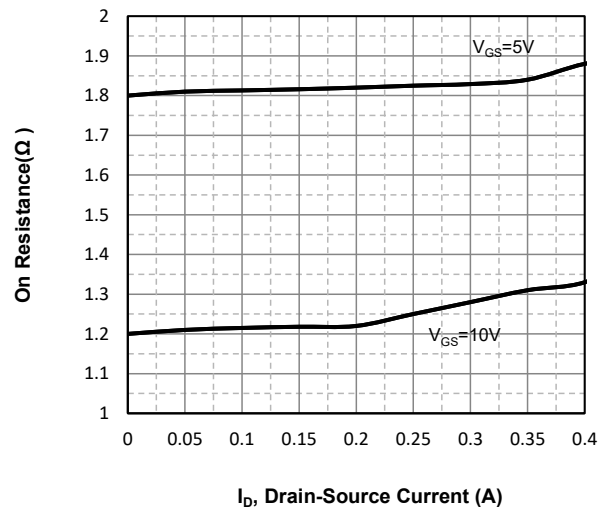


Fig4. On-Resistance Vs. Drain-Source Current

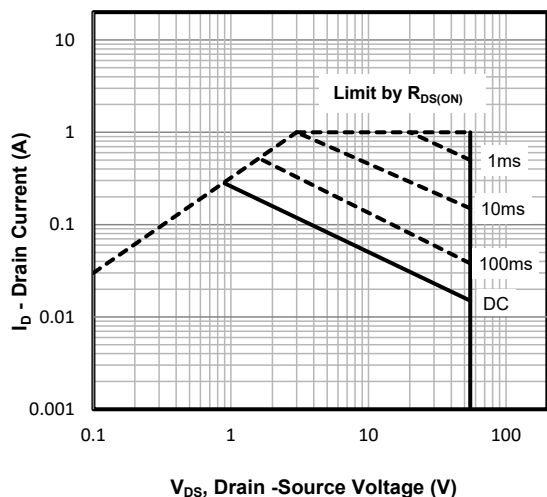


Fig5. Maximum Safe Operating Area


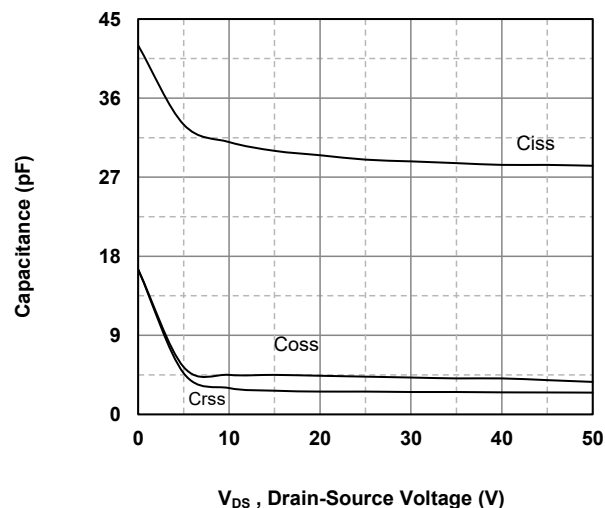


Fig6 Typical Capacitance Vs. Drain-Source

SOT-23 Package information

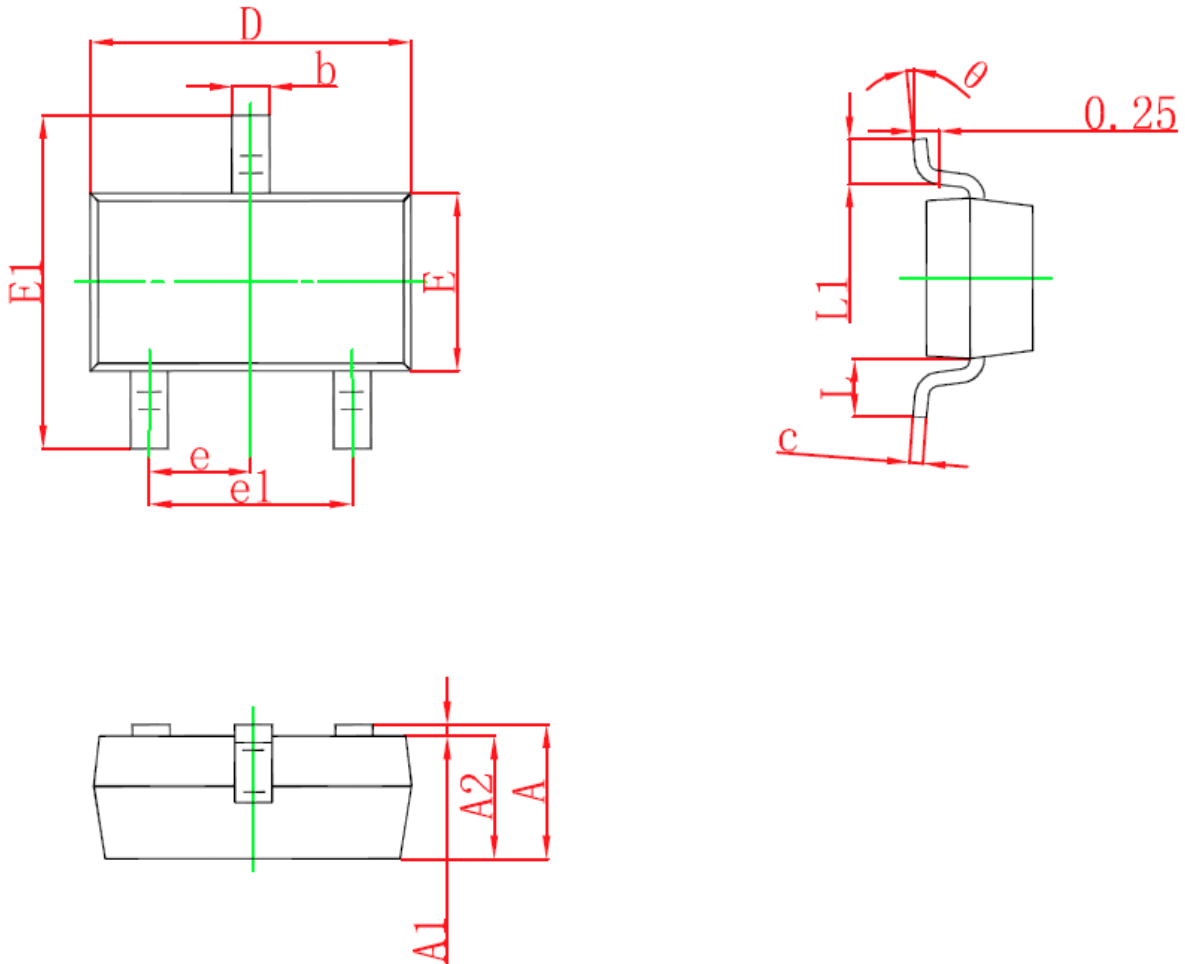

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E1	2.250	2.550	0.088	0.100
E	1.200	1.400	0.047	0.055
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°